Responding to Various Needs by Advanced Technology

PONSTAR

PX-50

IMPROVED MATERIAL

SUPERIOR CONSTRUCTION

COMPACT INDISIGN

POWERFUL PERFORMANCE!

New generation submersible pump-Invertible delivery flange leature

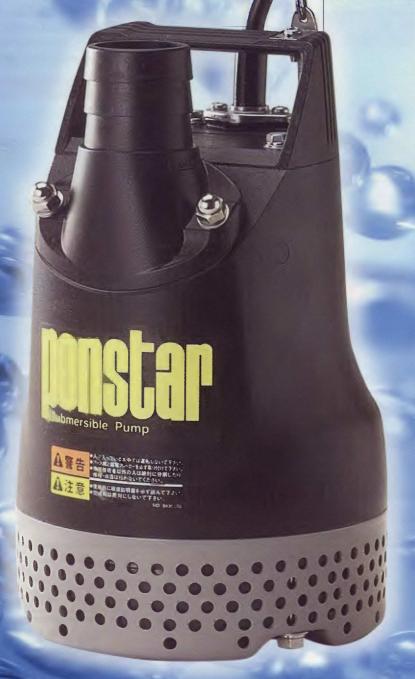


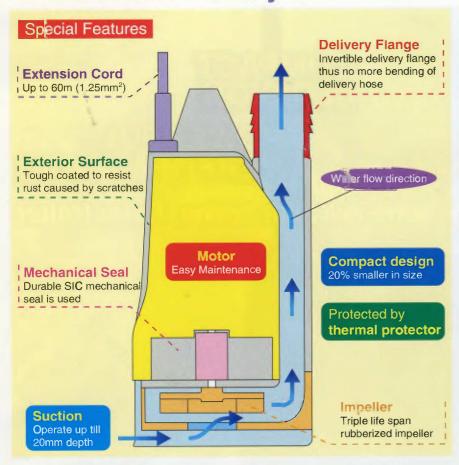


Photo: PX-50



PX-50

Excellent durability suitable for various purposes



Triple life span due to special rubberized impeller as compared with cast iron impeller.





Suitable for

- Construction site
- Pond/aquarium usage
- Agricultural irrigation
- Home/domestic application

Performance curve



Just 2 bolts delivery flange is inverted.

Change delivery flange direction and delivery hose will never be bent again.

For the purpose of improvement, specifications are subject to changes without notice.

Specifications

	Model	PX-55022
PUMP	Connection Dia	50m/m (2")
	Total Head	10m
	Delivery Volume	260 liters/min
MOTOR	Voltage	AC-220V (180V~260V)
	Frequency	50Hz
	Out put	400W
	Rated Current	3.2A
	Consumption	620W
	Revolution	2900rpm
	Model	Condenser Induction Motor
	Power Cord	5m
Sta	andard Accessories	1 Hose Bands 1 Rope
G	ross Weight	25kg
Dimension		258x500x424

Condenser motor requires 3 times starting rated current.





KOSHIN LTD

KYOTO, JAPAN www.koshinpump.com

KOSHIN AMERICA CORP. KOSHIN EUROPE OFFICE