

SANIFOS® 110

SINGLE PHASE



Product Ref: 6106



An automatic lifting station that can be used for pumping residential or industrial waste water when the sewer is at too high a level for natural gravity drainage.

Why choose this product?

- Designed for drainage of a single dwelling incorporating WC, bathroom, kitchen, utility room.
- Single macerator pump with float activation
- Robust cutting blades to prevent clogging
- 110 litre storage tank
- Powerful automatic motor with quiet operation
- Easy handling for installation below ground level
- External non return valve and shut off valve needed for Sanifos 110
- Maximum pumping height at Q=0 l/min is 14 metres, however maximum recommend pumping height is 11 metres.



Sanifos 110 discharge kit consisting of a non-return valve and shut-off valve. See page 25 for details.

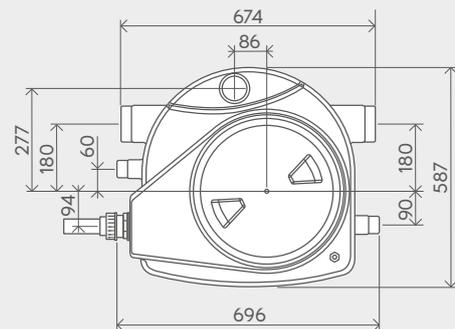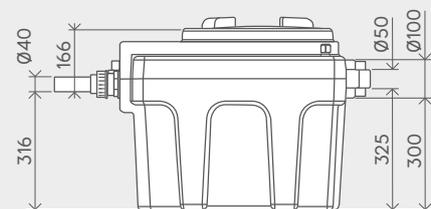

Discharge Pipework
40 / 50mm*

Motor Power
1500 Watts

Voltages
220-240 V/50 Hz

Tank Volume
110L

Working Waste Water Temp
70°C (max 5 minutes)

Flow Rate
11m³/hour

Inlet Pipework
50 / 40 / 100 / 110 / 125mm

Product weight
23kg

IP Rating
IP68

* Please note that the discharge pipework is 40 or 50mm metric outside diameter.

