

SANIFOS® 250



SINGLE PHASE

Product Ref: **6107** (bladed) / **6107VX** (vortex)

An automatic lifting station that can be used for pumping residential or industrial waste water when the sewer is at too high a level for natural gravity drainage. New vortex version is the same as bladed model but with vortex technology.

Why choose this product?

- Designed for drainage of a single dwelling incorporating WC, bathroom, kitchen, utility room.
- Single pump with float activation
- Robust cutting blades to prevent clogging or powerful vortex version
- 250 litre storage tank
- Powerful automatic motor with quiet operation
- Easy handling for installation below ground level
- Maximum pumping height for Sanifos 250 bladed at Q=0 l/min is 14 metres, however maximum recommend pumping height is 11 metres
- Maximum pumping height for Sanifos 250 vortex at Q=0 l/min is 13 metres, however maximum recommend pumping height is 11 metres.

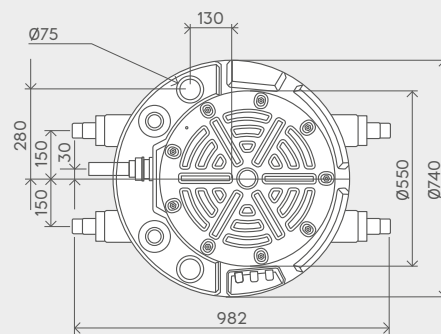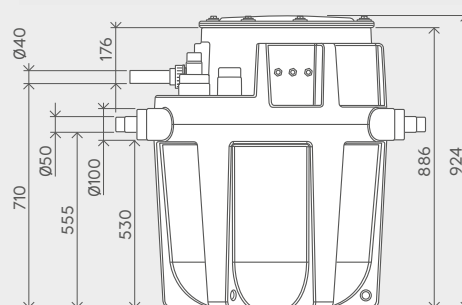

Discharge Pipework
40 / 50mm

Motor Power
1500 Watts

Voltages
220-240 V/50 Hz

Tank Volume
250L

Working Waste Water Temp
70°C (max 5 minutes)

Flow Rate
11m³/hour

Inlet Pipework
50 / 40 / 100 / 110 / 125mm

Product weight
38kg

IP Rating
IP68

