
	GRUNDFO	os X	Company name: Created by: Phone:	Anchor Pumps Company Limited			
			Date:	17/11/2020			
<i>'</i> .	Description						
	MAGNA1 D 65-120 F						
	NEW MAGNAI						
	Crean	9					
		GNDFOR X					
		Note! Product picture	e may differ from actual pro	oduct			
	Product No.: 99221380 The new MAGNA1 is the simple option for a job well done. It is the perfect choice when replacing older circulators and due to its compliance with the EuP 2015 regulations, substantial savings on electricity is a reality. The ideal choice for basic performance needs in applications where basic system control and monitoring is desired.						
	 Monitoring via the fault relay, ensuring peace of mind Digital start/stop input available for remote pump control 						
	Continuous operation and reduced downtime with the wireless twin pump function (available on twin-head pumps)						
	 High energy efficiency res Easy setup and operation No maintenance due to the 	via the simple user i	interface				
	MAGNA1 is the simple and efficient choice for most applications including						
	 Heating Main pump Mixing loops 						
	Heating surfacesCooling						
	 Air conditioning surfaces Ground source heat pump systems Smaller chiller applications 						
	Liquid:						
	Pumped liquid:	Water					
	Liquid temperature range:	-10 110 °C					
	Selected liquid temperature: Density:	60 °C 983.2 kg/m³					
	Technical: TF class:	110					
	Approvals on nameplate:	CE,VDE,EAC,CN R	OHS,WEEE				
	Materials:						
	Pump housing:	Cast iron EN-GJL-250					
	Impeller:	ASTM A48-250B PES 30%GF					
	Installation:	0 40.80					
	Range of ambient temperature: Maximum operating pressure:	0 40 °C 10 bar					
	Flange standard:	DIN					
	Pipe connection:	DN 65					
		DN 65 PN 6/10					



Company name: Anchor Pumps Company Limited Created by: Phone:

			Date:	17/11/2020	
y.	Description				
	Electrical data: Power input - P1:	24.89 769 W			
	Mains frequency:	24.89 789 W 50 / 60 Hz			
	Rated voltage:	1 x 230 V			
	Maximum current consumption:				
	Enclosure class (IEC 34-5):	X4D			
	Insulation class (IEC 85):	F			
	Others:				
	Energy (EEI):	0.21			
	Net weight:	40 kg			
	Gross weight:	47.5 kg			
	Shipping volume:	0.132 m ³			
	Country of origin: Custom tariff no.:	DE 84137030			
		04137030			

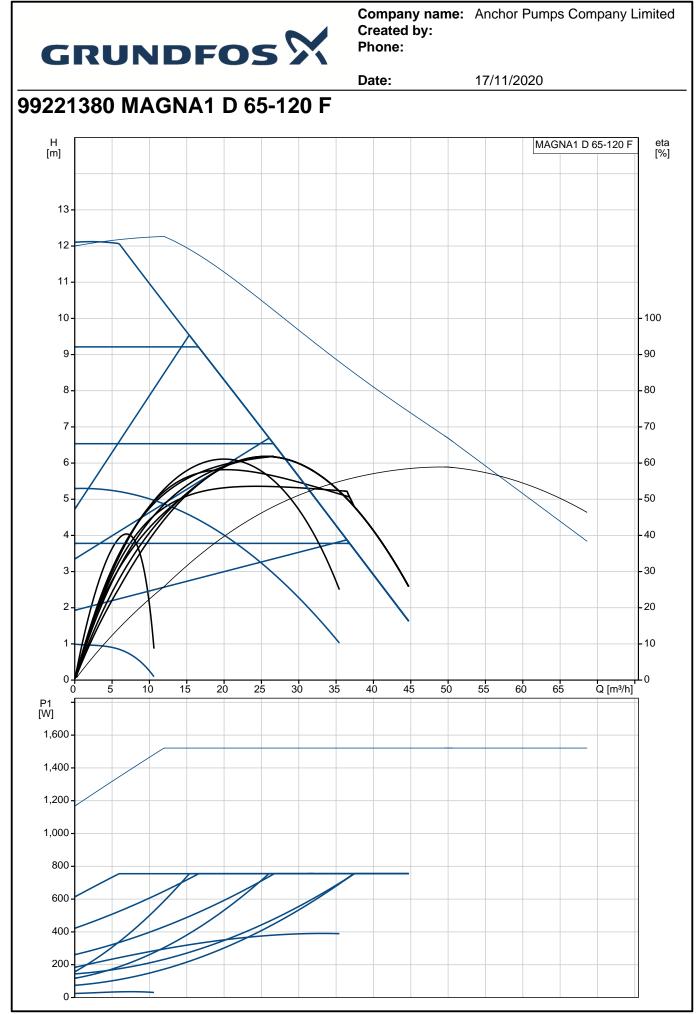



Printed from Grundfos Product Centre [2020.10.020]




Company name: Anchor Pumps Company Limited Created by: Phone:


Description	Value		
General information:			
Product name:	MAGNA1 D 65-120 F		
Product No:	99221380		
EAN number:	5712608943522		
Technical:			
Head max:	120 dm		
TF class:	110		
Approvals on nameplate:	CE,VDE,EAC,CN ROHS,WEEE		
Model:	С		
Materials:			
Pump housing:	Cast iron		
Pump housing:	EN-GJL-250		
Pump housing:	ASTM A48-250B		
Impeller:	PES 30%GF		
Installation:			
Range of ambient temperature:	0 40 °C		
Maximum operating pressure:	10 bar		
Flange standard:	DIN		
Pipe connection:	DN 65		
Pressure rating:	PN 6/10		
Port-to-port length:	340 mm		
Liquid:			
Pumped liquid:	Water		
Liquid temperature range:	-10 110 °C		
Selected liquid temperature:	60 °C		
Density:	983.2 kg/m ³		
Electrical data:			
Power input - P1:	24.89 769 W		
Mains frequency:	50 / 60 Hz		
Rated voltage:	1 x 230 V		
Maximum current consumption:	0.27 3.39 A		
Enclosure class (IEC 34-5):	X4D		
Insulation class (IEC 85):	F		
Others:			
Energy (EEI):	0.21		
Net weight:	40 kg		
Gross weight:	47.5 kg		
Shipping volume:	0.132 m³		
Country of origin:	DE		
Custom tariff no.:	84137030		

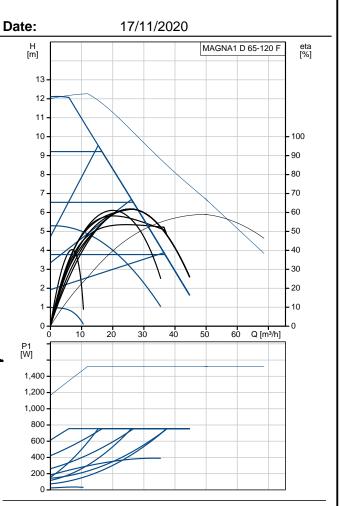





Example of mains-connected motor with mains switch, backup fuse and additional protection







Company name: Anchor Pumps Company Limited Created by: Phone:

17/11/2020

99221380 MAGNA1 D 65-120 F



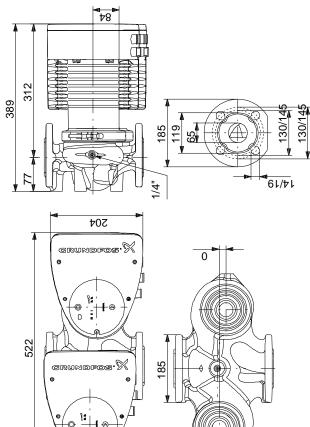

Note! All units are in [mm] unless others are stated. Disclaimer: This simplified dimensional drawing does not show all details.

