

TapBoost

Overview

Boosts the water flow of a single outlet to 7 – 12 litres per minute, depending on incoming flow.

TapBoost has been developed to provide a solution to a mains or gravity fed **single outlet** suffering with poor water performance.




Product features and uses

- Boosts water flow to a single outlet to 7 – 12 litres per minute, depending on incoming flow.
- Very quiet in operation
- Compact design for fitting in tight spaces
- Fitted to either a hot or cold outlet
- Brass ends
- Inline design for easy installation

Applications:


- Bathroom sink – hot and/or cold
- Kitchen sink – hot and/or cold
- Bath taps and fittings
- Garden tap (pump installed inside)
- Toilet cistern
- Dishwasher
- Washing machine

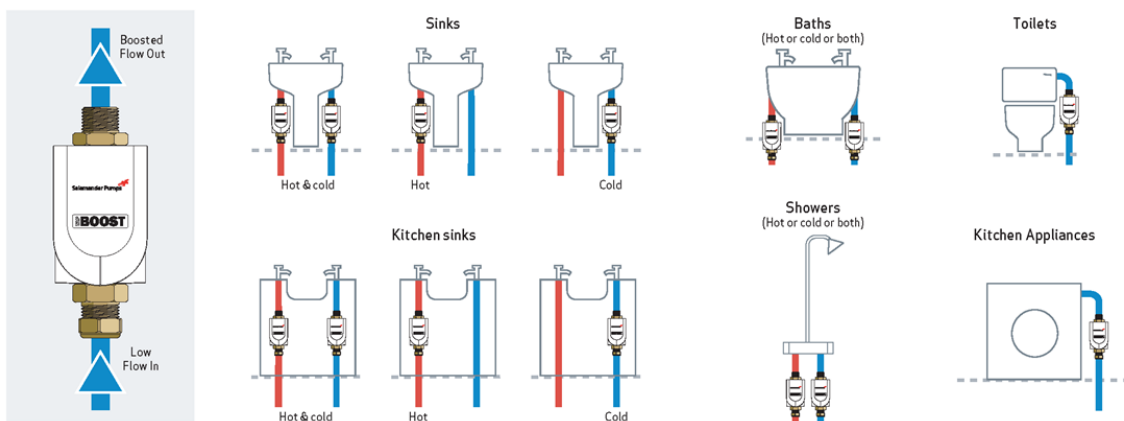

Product specification

- ½" BSP Male connection outlet/15mm compression fitting (inlet)
- Minimum flow required for activation: 1.2 lpm

| Height | Width | Depth | Weight |
|--------|-------|-------|--------|
| 124mm | 53mm | 95mm | 900g |

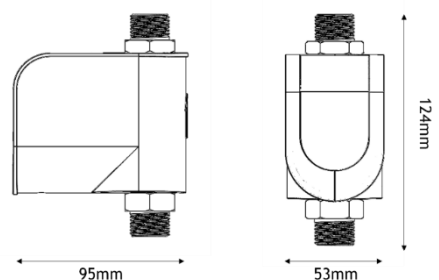

Confidentiality: This document must not be used by or disclosed to any other party without the permission of Salamander Pumps Ltd.