

SUBMERSIBLE PUMPS

DRENO COMPATTA VORTEX PUMPS

E


The main components are fabricated in cast iron GG20, in the standard configuration a lip seal is fitted to the motor side, and a mechanical seal to the impeller side. The Compatta Series is ideal to pump residential sewage thanks to its small size and mechanical characteristics. Maximum liquid temperature 40°C. Maximum depth of immersion 20 metres. Power cable 10 metres. Many of the Dreno pump ranges are available ATEX approved. More models continue on the following pages.

Features

- Cast Iron Pump Body
- Cast Iron Impeller
- Max Solids 22/32 Series 40mm
- 4/55 Series 50mm

Applications

- Heavy Duty
- Sewage
- Dirty Water

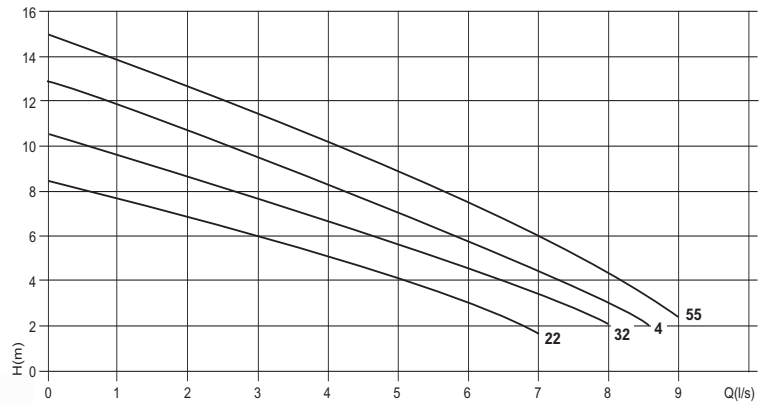

MODEL	VOLT	OUTLET	LM/HM	Kw	AMP	H x W x L mm	Kg	CODE
COMPATTA 22M MANUAL	230v	2"	420/8	0.56	3.6	400x175x225	15	200-0020
COMPATTA 22T MANUAL	400v	2"	420/8	0.56	1.7	400x175x225	15	200-0022
COMPATTA 22TG AUTO	400v	2"	420/8	0.56	1.7	400x175x225	15	200-0023
COMPATTA 32M MANUAL	230v	2"	480/10	0.75	5.2	399x175x225	17	200-0026
COMPATTA 32T MANUAL	400v	2"	480/10	0.75	1.9	399x175x225	17	200-0028
COMPATTA 32TG AUTO	400v	2"	480/10	0.75	1.9	399x175x225	17	200-0029
COMPATTA 4M MANUAL	230v	2"	510/13	1.1	7.6	444x176x226	19	200-0032
COMPATTA 4T MANUAL	400v	2"	510/13	1.1	2.9	444x176x226	19	200-0034
COMPATTA 4TG AUTO	400v	2"	510/13	1.1	2.9	444x176x226	19	200-0031
COMPATTA 55MG AUTO	230v	2"	540/13	1.5	9.9	444x176x226	21	200-0035
COMPATTA 55TG AUTO	400v	2"	540/13	1.5	3.9	444x176x226	21	200-0039