


Sanicondens Clim Mini



6 m
↑

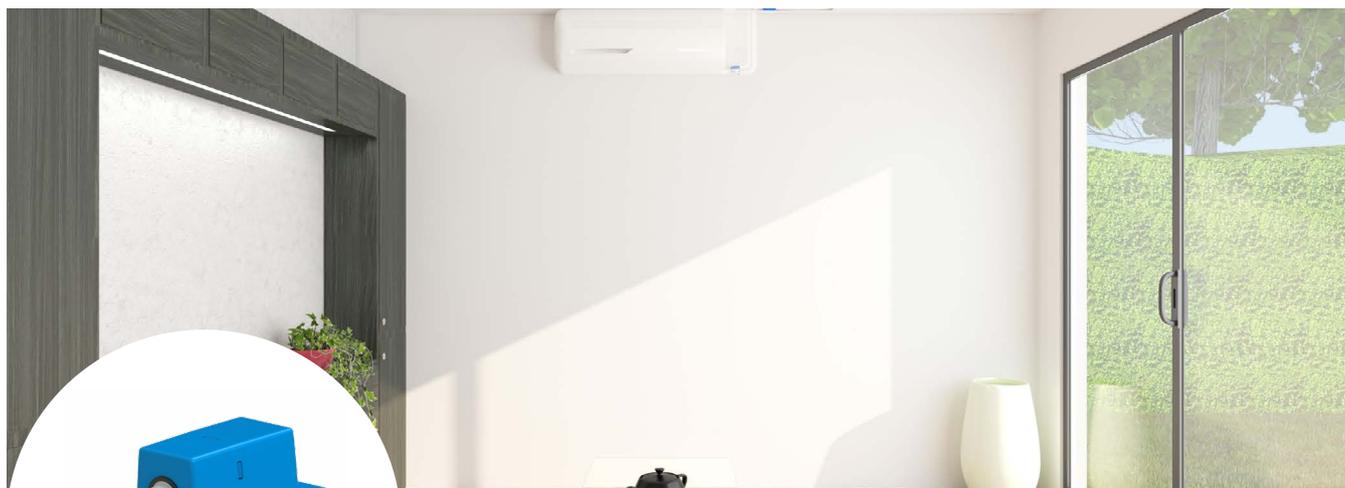


PRODUCT BENEFITS

- Compact unit for discreet installation
- Low noise level, only 21 dB(A)
- Safety system with thermal protector and overflow alarm
- Easy to check, transparent base

INSTALLATION DIAGRAM

- (A) Condensate tank
- (B) Level sensor
- (C) Pump unit
- (D) Anti-siphoning vacuum breaker
- (E) Waste water pipe




TECHNICAL FEATURES

Max. power of the boiler	8 kW
Inlet diameter DN	16 mm
Discharge diameter DN	6 mm
Max. flow rate	9 l/h +/-15%
Max. incoming temperature	35°C
Max. suction distance between the detection bloc and the pump	2 m
Voltage / Frequency	220-240 V / 50-60 Hz
Max. power consumption	22 W
IP Rating	IP24
Noise level	21 dB(A)
Identification and logistics	
EAN code	3308815083520
Product code	1131

PACK CONTAINS

Sanicondens Clim mini pump, detection unit, flexible hose (1.2 m), mounting bracket, vent tube, power cable supplied

CURVE

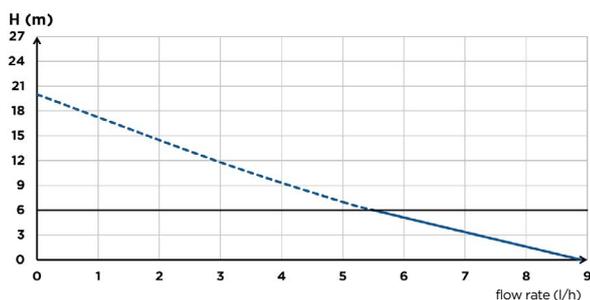

— recommended max height: 6 m

DIMENSIONS

