

Sentinel X500 Inhibited Antifreeze

Leave-in protection against freezing temperatures, corrosion and limescale

To provide protection against corrosion and limescale in properties vulnerable to sub-zero temperatures, cleaned central heating systems should be dosed with Sentinel X500 Inhibited Antifreeze.

- **Superior frost protection**
Safe to use non-toxic product protects to at least -6°C.
- **Intelligent formulation with multiple pH stabilisers**
Prevents large swings in pH which can cause and accelerate corrosion of high value components such as heat exchangers and radiators.
- **Unique anti-corrosion formulation with heavy duty inhibitors**
Protects all common system metals against corrosion.
- **Multiple limescale inhibitors**
Protect high value components such as heat exchangers against limescale formation.



The Sentinel System
Lifetime protection for heating, cooling and hot water systems using the best practice process of...



Application

Sentinel X500 is a multipurpose inhibited antifreeze formulated to help control corrosion, scale, boiler noise and hydrogen gassing in all types of indirect heating systems as well as heat pump and hybrid systems, including those containing aluminum. If minimum levels are maintained the product ensures a permanent protection and does not need to be replaced. Sentinel X500 is suitable for use in all waters, both hard and soft. The low toxicity formulation is colourless and easy to handle.

Dosing

The dosage of Sentinel X500 will depend on the level of frost protection required. One 20L drum of Sentinel X500 added to a typical domestic system of 8 to 10 radiator panels will provide the minimum concentration of corrosion and scale inhibitor and also protection from freezing down to approximately -6°C. Two 20L drums will provide protection to -20°C. A dosage of 20% or more is needed to achieve the minimum concentration of corrosion and scale inhibitor.

The Sentinel X100 Quick Test Kit can be used to verify that this level has been reached. To determine the precise glycol concentration, a refractometer is required. Further information is available upon request.

For best results, it is recommended that systems are cleansed and flushed in accordance with BS7593; new systems and those up to 6 months old with Sentinel X300, existing systems with Sentinel X400 or X800. If the system is already noisy due to limescale deposits in the heat exchanger, Sentinel X200 should be added together with Sentinel X500.

Open Systems Dose via F&E cistern, via a by-pass feeder or use a Sentinel Dosing Vessel.

Sealed Systems If the system is empty, add to any convenient point before filling.
If full, use a Sentinel Dosing Vessel to inject via the filling loop or other access point.

Physical properties

Appearance Clear colourless liquid

Odour Mild, slightly sweet

Specific gravity 1.04 (20°C)

pH in aqueous solution (5%) 6.5 (approx)

Freezing point -58°C

Safety information



The information provided below enables compliance with the Control of Substances Hazardous to Health Regulations. A full Safety Data Sheet is available upon request.

Description	Inhibitor for central heating systems An aqueous solution of inorganic and organic corrosion and scale inhibitors.
Handling	Avoid contact with skin and eyes. Keep out of reach of children and animals. Wash out empty container thoroughly with water before disposal.
Storage	Keep container tightly closed. Store in cool, well ventilated area.
Spillage	Flush spillage with plenty of water and wash to waste.
First aid	Skin Exposure: Wash immediately with plenty of water. If irritation develops, seek medical attention. Eye Exposure: Flush immediately with plenty of running water. Keep eyelids apart. Seek medical advice. Ingestion: Rinse mouth with water. Do NOT induce vomiting! Seek medical advice.
Additional	Not for use in potable water systems. Not considered hazardous to health. Non-flammable.




Appendix

The following graphs depict the most important physical properties of Sentinel X500 mixtures.

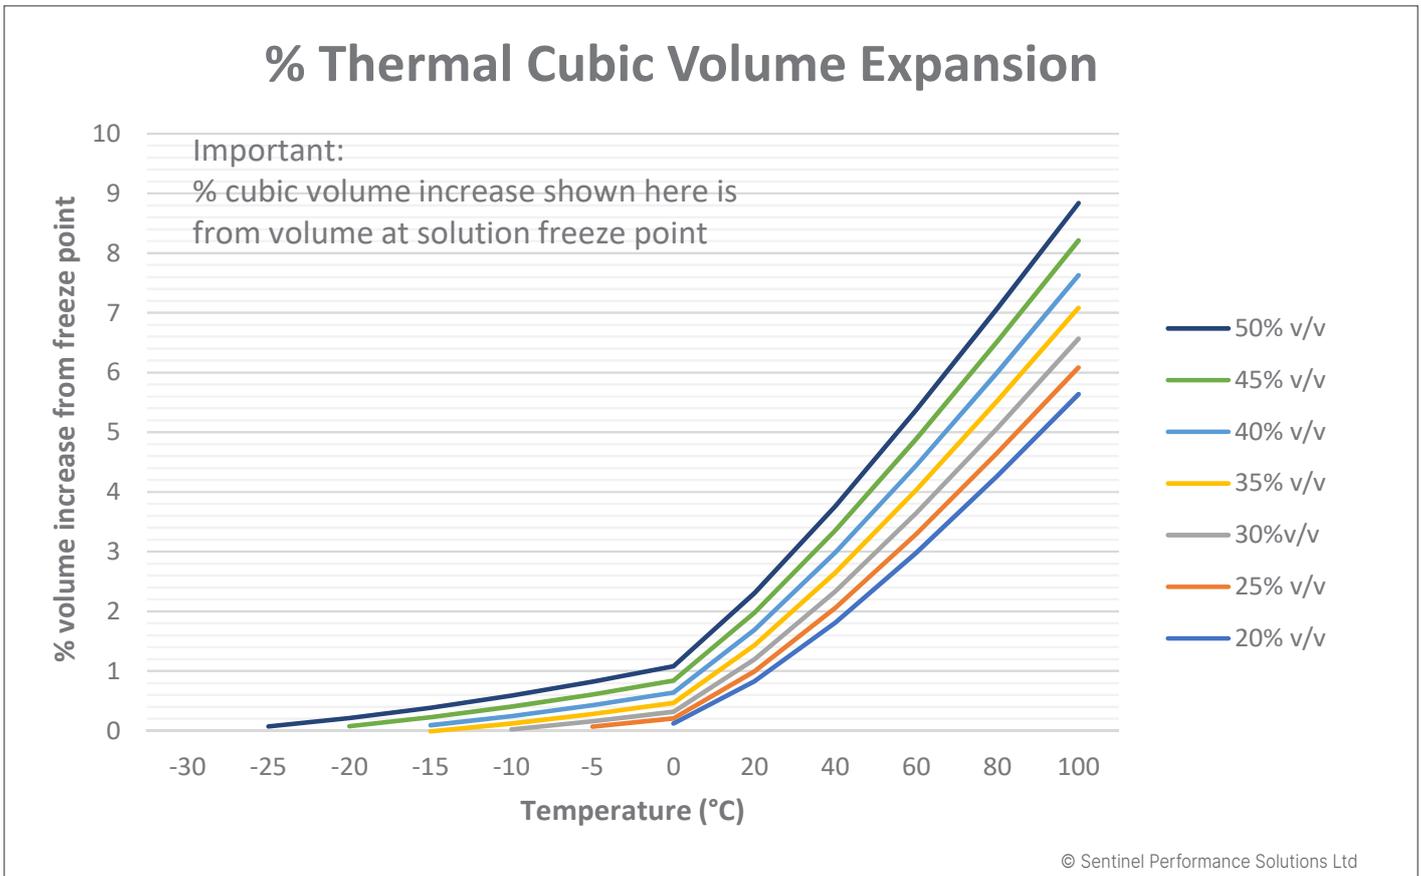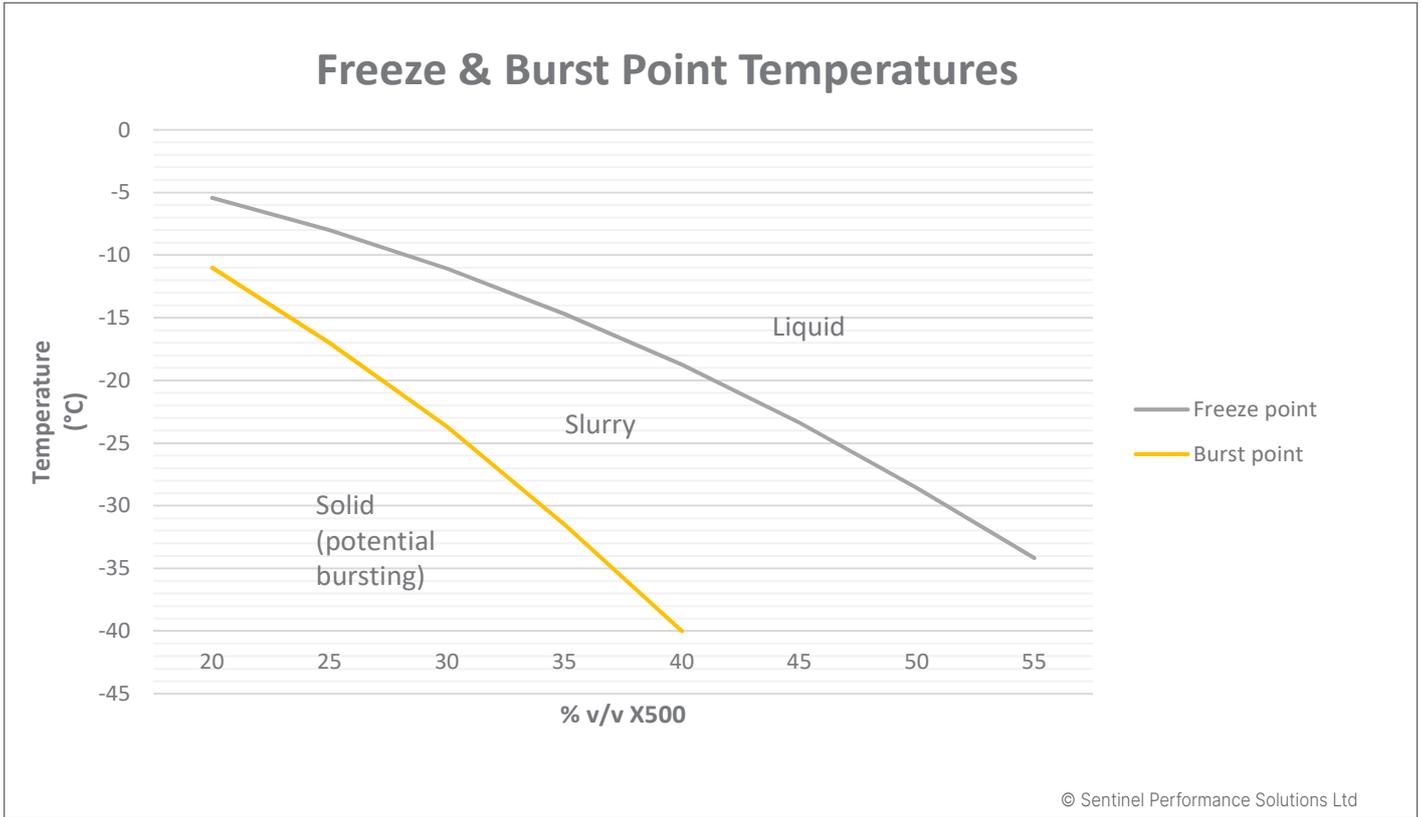


Refractive Index

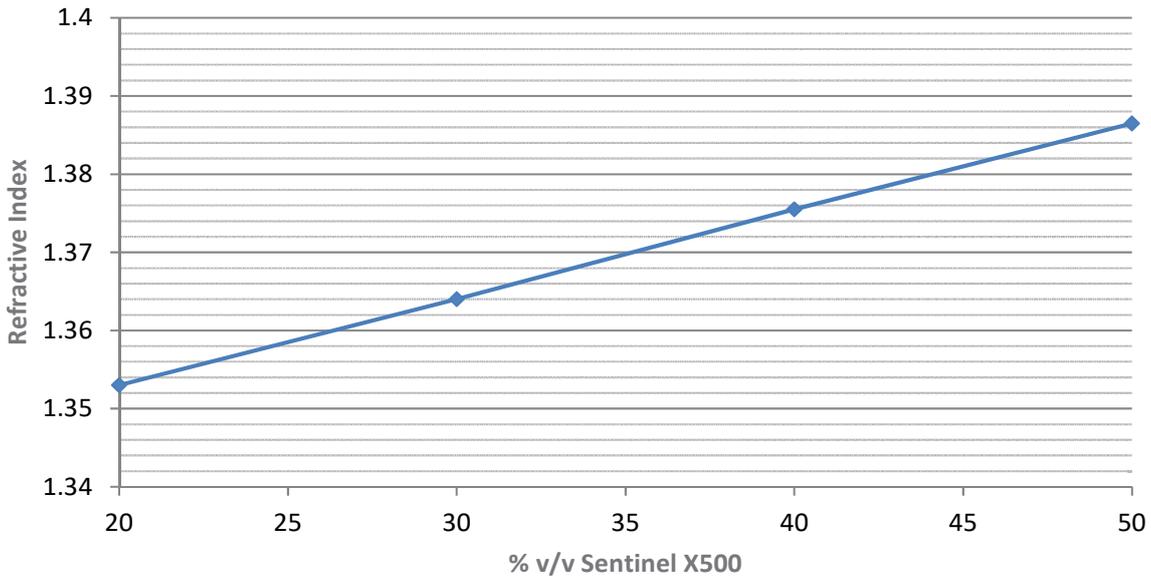


© Sentinel Performance Solutions Ltd

Kinematic Viscosity Sentinel X500

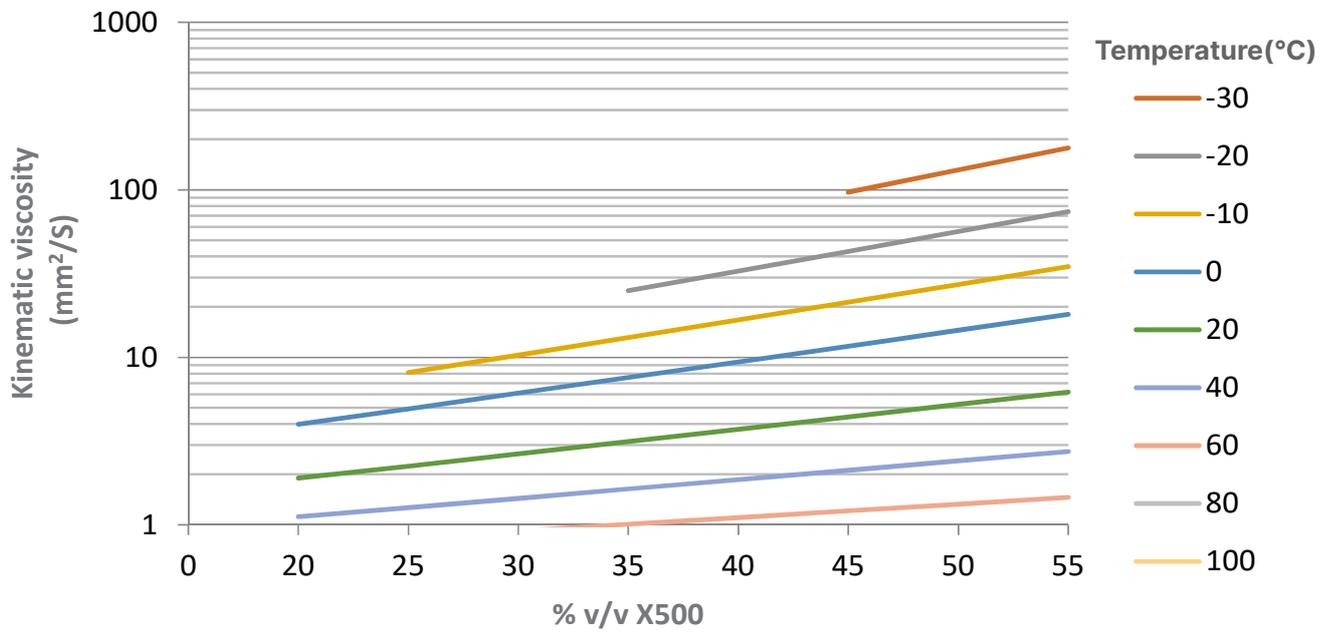


© Sentinel Performance Solutions Ltd

Thermal Conductivity

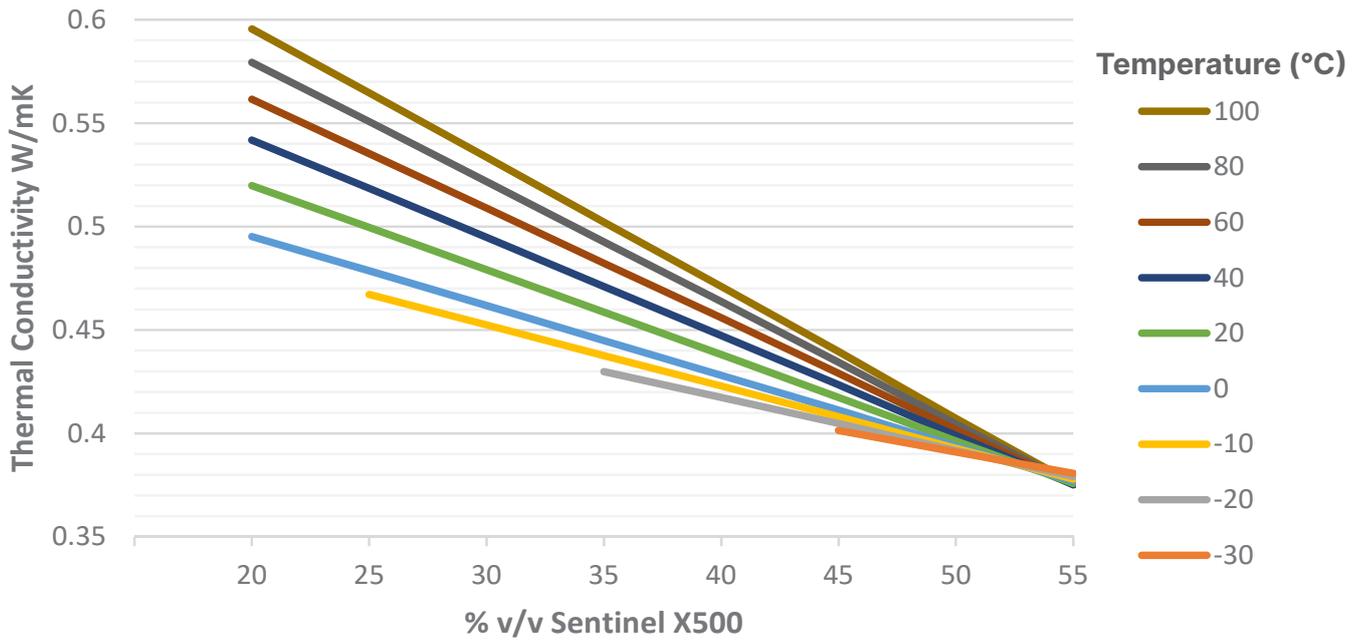

© Sentinel Performance Solutions Ltd


Specific Heat

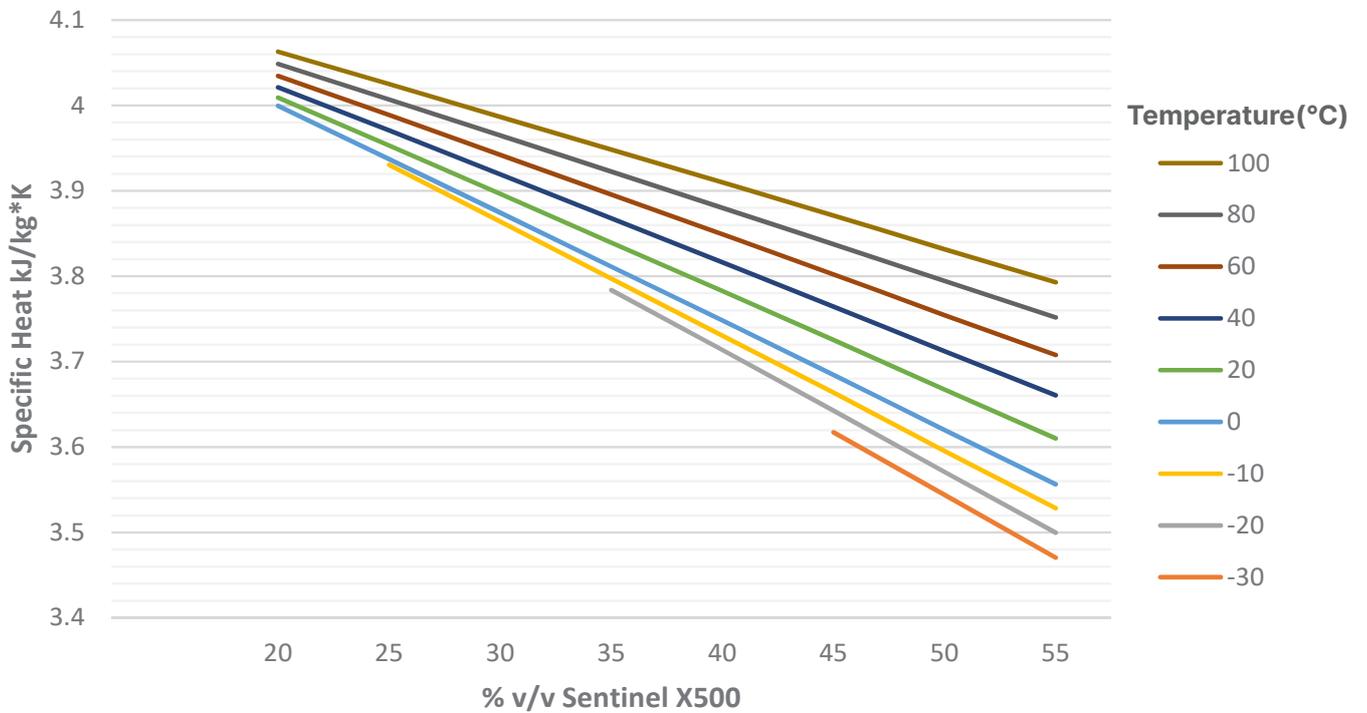

© Sentinel Performance Solutions Ltd



Prandtl-Zahl Number

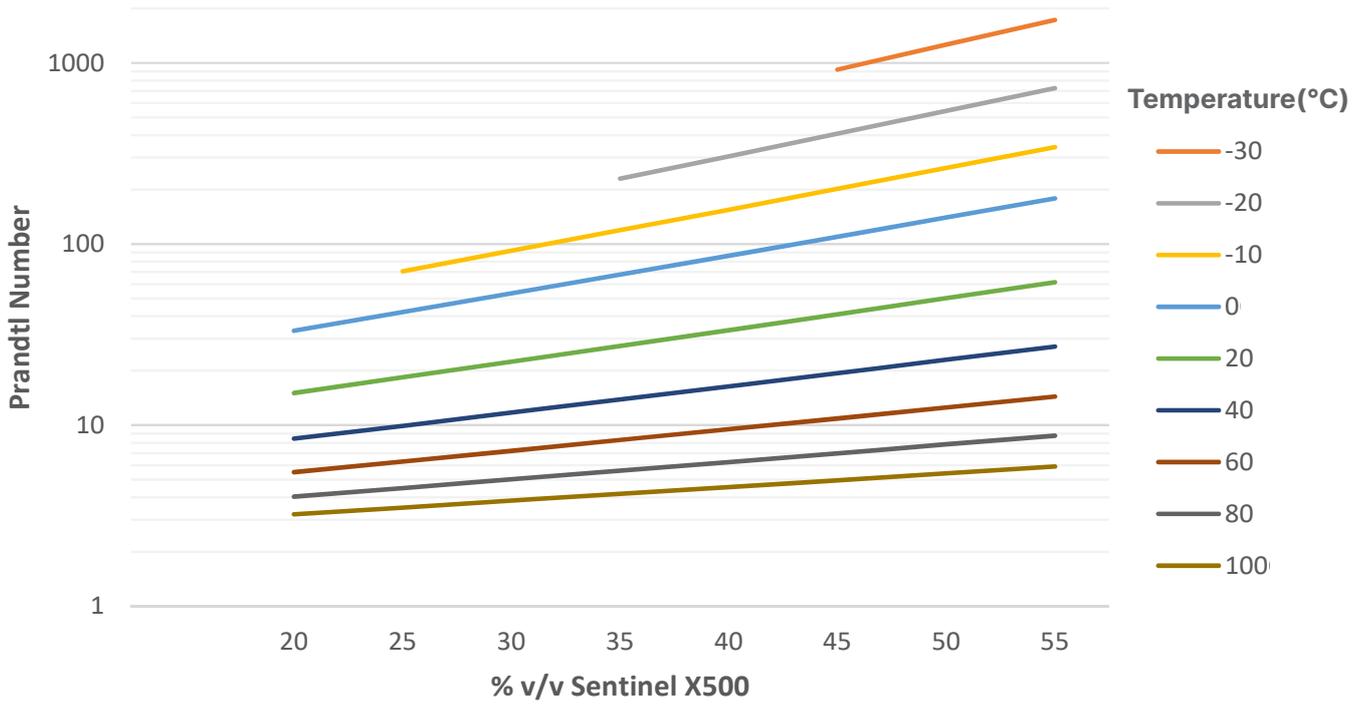

© Sentinel Performance Solutions Ltd

The use of Sentinel water treatment is endorsed by the industry's major international manufacturing companies*



Sentinel Performance Solutions Ltd.

7650 Daresbury Park, Warrington, Cheshire, WA4 4BS, United Kingdom. Tel: +44 (0) 1928 704 330

Sentinel is a trade mark owned by Sentinel Performance Solutions Ltd.

www.sentinelprotects.com

