


10SVE03F015P0T/5 | Configuration Summary



The SVE pump is a non-self priming vertical multistage pump coupled with eSM drive. The pump casing is available with different configurations and connection types.

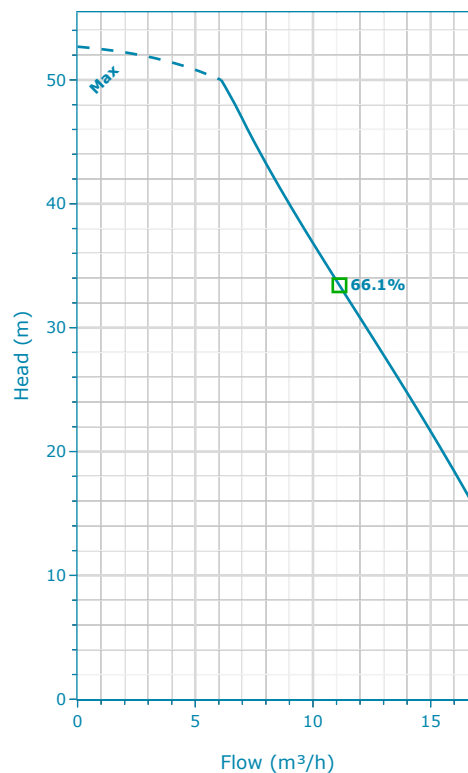

Performance according to ISO 9906:2012

PUMP

Installation
Complete Pump

MATERIALS

Pump Body Material	Impeller Material
Stainless Steel (AISI 304)	Stainless Steel (AISI 304)

SEAL

Type of Seal	Rotating Face
Mechanical Seals	Silicon Carbide
Name	Stationary Face
Q1BEGG	Resin Impregnated Carbon
	Elastomers
	EPDM
	Springs
	AISI 316
	Metal Components
	AISI 316
	Min Temperature
	-30.0 °C
	Max Temperature
	120.0 °C

MOTOR


Poles	Power
2	1.5 kW
	Phase (~)
	3
	Voltage
	208-240/380-460 V

FLANGE


Flange
[F] = Round Flanges (AISI 304)

10SVE03F015P0T/5 | Product Details

SV F-N

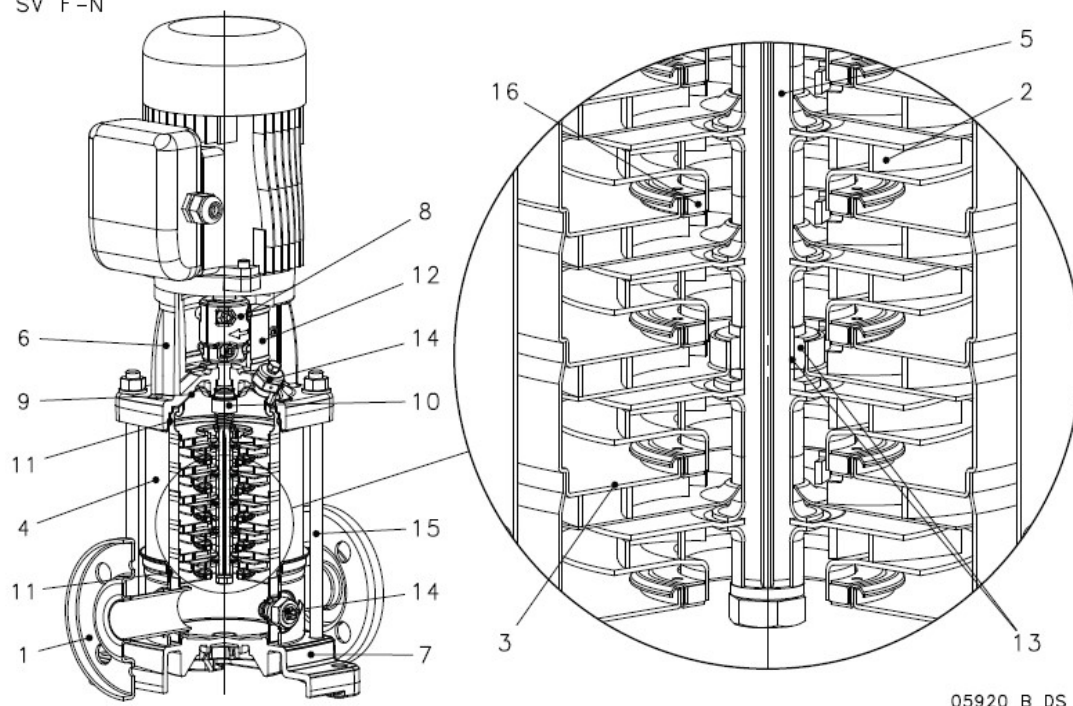

SV R



SV T




SV V-P



SV C



SV K




Construction Materials

Pump body (1) Stainless steel / AISI 304	Shaft (5) Stainless steel / AISI 304	Seal housing (9) Stainless steel / AISI 304	Shaft sleeve and bushing (13) Tungsten carbide
Impeller (2) Stainless steel / AISI 304	Adapter (6) Cast Iron / ASTM Class 35	Mechanical seal (10) See Seal section	Fill / Drain plugs (14) Stainless steel / AISI 304
Diffuser (3) Stainless steel / AISI 304	Base (7) Aluminium	Elastomers (11) See Seal section	Tie rods (15) Galvanized steel
Outer sleeve (4) Stainless steel / AISI 304	Coupling (8) Aluminium	Coupling protection (12) Stainless steel / AISI 304	Wear ring (16) Technopolymer PPS

Motor

Motor Name ESM90R/315 SVE	Phase 3	Enclosure IP 55	ICL F
Design e-SM Motor	Rated power 1.5 kW	Frame Size 90R	Standard IEC
Service Factor 1	Rated Current 6.69-6.08/4.48-3.97 A		
Voltage 208-240/380-460 V	Motor Vendor Lowara		
Speed 3600.0 rpm			

10SVE03F015P0T/5 | Hydraulic Data & Performance Curve

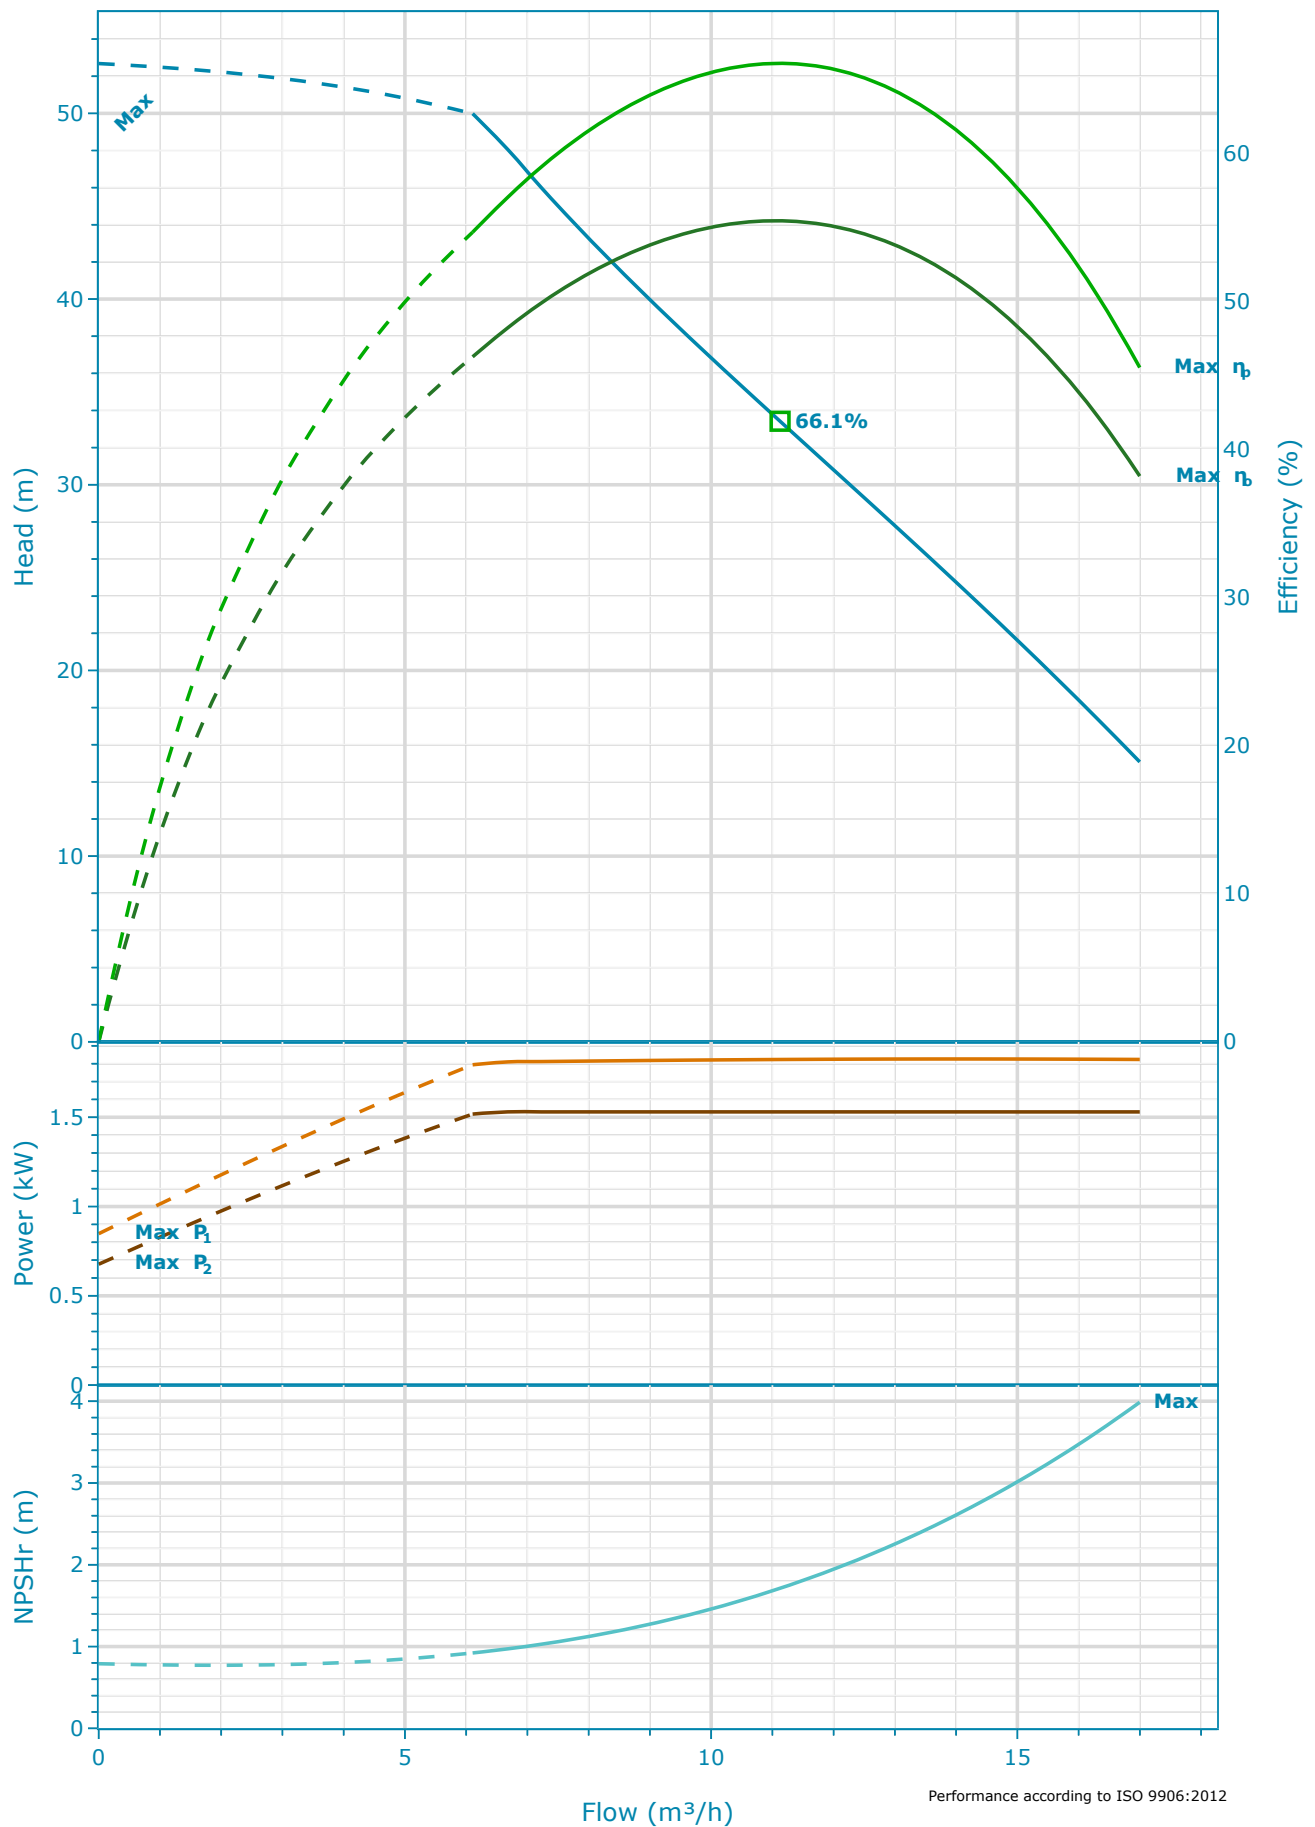

Selection

Series	Standby Pumps
e-SVE	No Standby Pump
Name	
10SVE03..015	
Stages	
3	
Frequency	
50 Hz	
Acceptance Grade	
Manufacturer's Standard	
System Type	
Single Pump	
Operating Pumps	
1	

Fluid and Operating Conditions


Fluid Type	Density
Water	1,000 kg/m ³
Fluid Temperature	Dynamic Viscosity
4 °C	0.002 Pa·s
Specific Gravity	Fluid Vapor Pressure
1	8.14 mbar
	Atmospheric Pressure
	1,013.53 mbar
	Elevation
	0 m
	Ambient Temperature
	20 °C
	NPSH Available
	10.27 m
	Submergence
	0 m

Design Curve

Rated Speed	BEP
3,600 RPM	66.07 %
Min Flow	BEP Flow
6.11 m ³ /h	11.13 m ³ /h
Max Flow	BEP Head
17 m ³ /h	33.42 m
H@QMin	Max Operating Pressure
49.99 m	5,158.93 mbar
H@QMax	Max P2
15.07 m	1.53 kW

10SVE03F015P0T/5 | Dimensional Data & Drawing

10-15-22SVE (F-N)

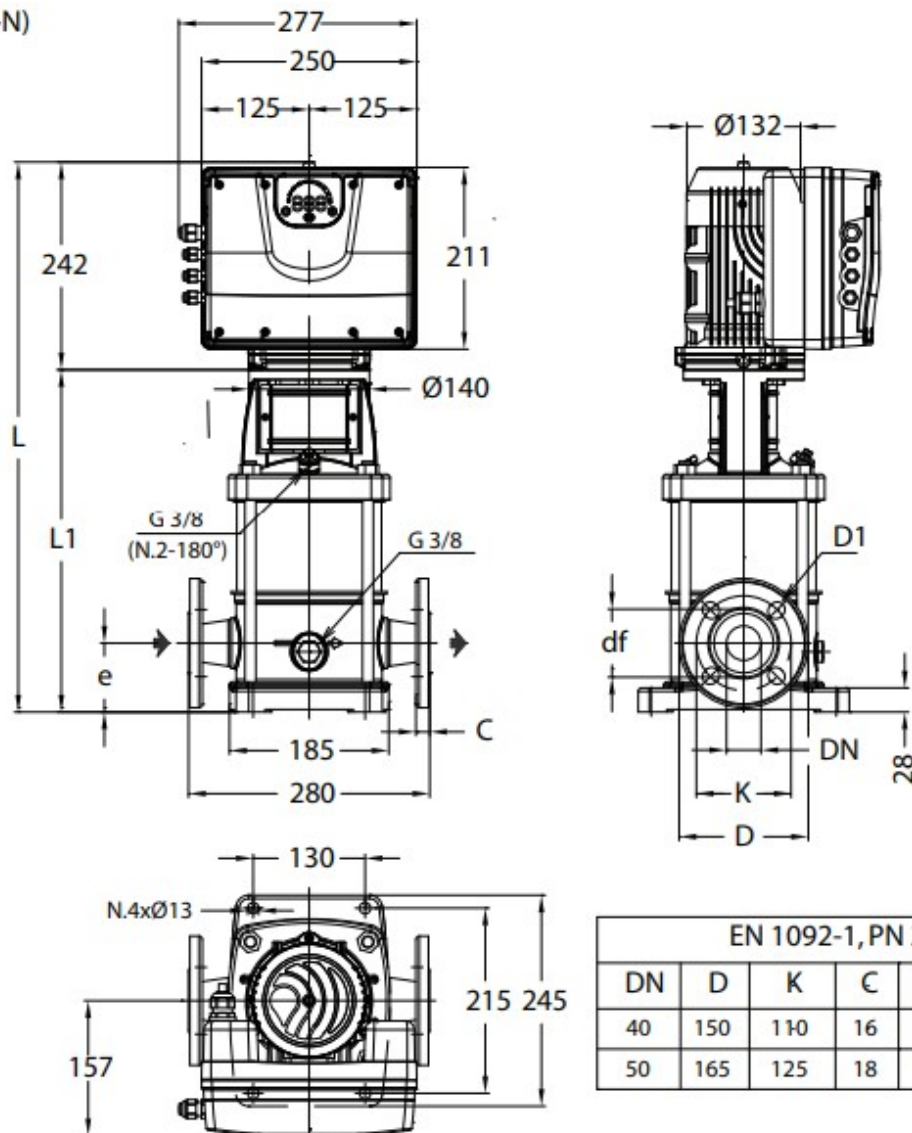

EN 1092-1, PN 25					
DN	D	K	C	df	L
40	150	110	16	79	4x18
50	165	125	18	98	4x18

Drawing is preliminary and is subject to change.

Dimensions

e	Weight (Pump)
80 mm	16.5 kg
L	Total Weight
641 mm	31 kg
L1	
399 mm	
DN	
40 mm	