


10SVI18-18CG075T5VQBV | Configuration Summary



The e-SVI is an efficient, reliable, high-performance pump, comprised of an energy saving, vertical multistage pump coupled to a IEC high efficient motor. Plus, an immersible hydraulic end provides an ideal solution for top mount applications.

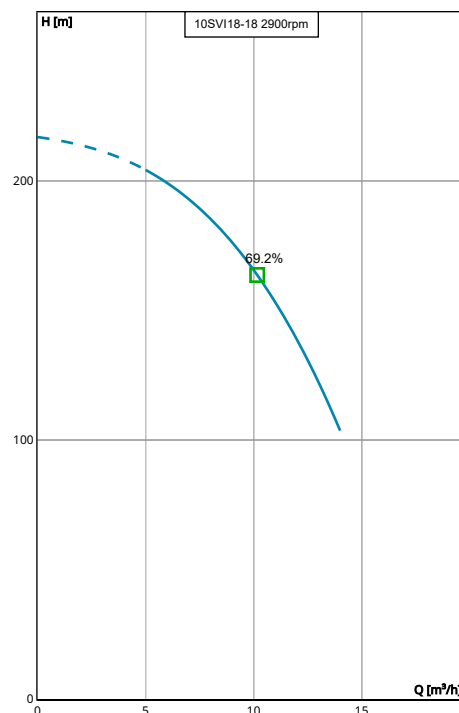

Performance according to ISO 9906:2012

PUMP

Installation	Number Of Impellers
Coupled	18
Immersion Depth	Empty Stages Added
65.76 cm	0
Minimum Depth	Total Number Of Stages
65.76 cm	18
Maximum Depth	Pump Size
104.15 cm	10SVI

MATERIALS

Construction
Stainless Steel (AISI 304)

SEAL

Type of Seal	Rotating Face
Cartridge Seals	Silicon Carbide
Name	Stationary Face
Q1BVG	Resin Impregnated Carbon
	Elastomers
	FKM (FPM)
	Springs
	AISI 316
	Metal Components
	AISI 316
	Min Temperature
	-10.0 °C
	Max Temperature
	90.0 °C

STANDARD OPTIONS

PTC Sensor	UL Approved (cURus)
------------	---------------------


MOTOR

Vendor	Power
Lowara PLM	7.5 kW
Frequency (Hz)	Phase (~)
50	3
Poles	Voltage
2	380-415/660-690 V
Efficiency	
IE3	

No

No

10SVI18-18CG075T5VQBV | Product Details

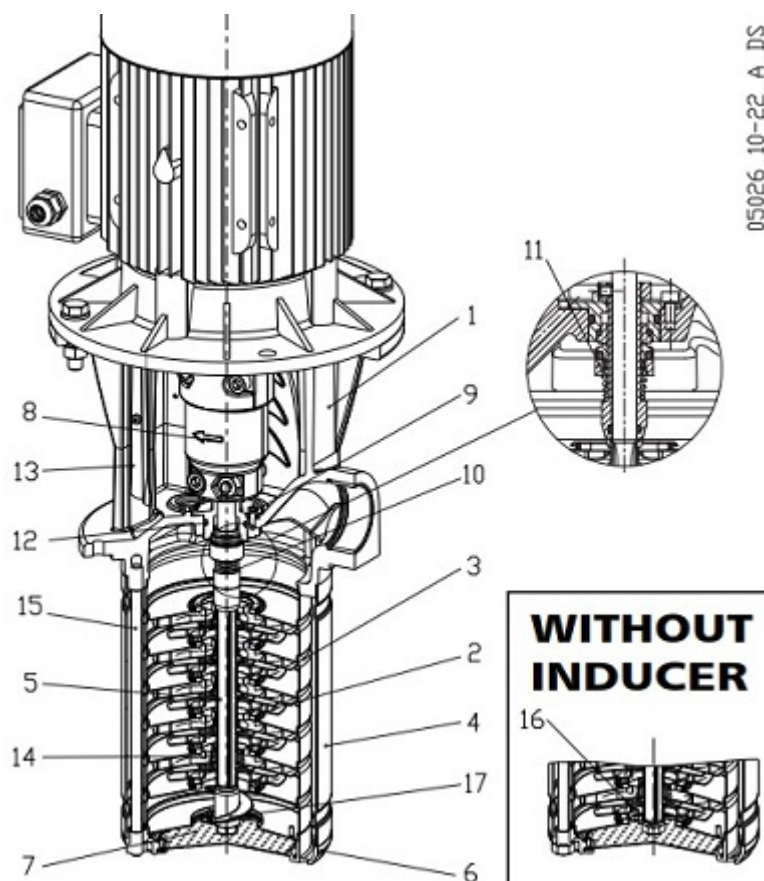

05026_10-22_A_DS


Construction Materials

Adapter (1) Cast iron / ASTM Class 35	Shaft (5) Stainless Steel / AISI 304	Removable seal housing (9) Stainless Steel / ASTM CF8M (AISI 316 cast)	Coupling protection (13) Stainless Steel / AISI 304
Impeller (2) Stainless Steel / AISI 304	Suction base (6) Stainless Steel / ASTM CF8M (AISI 316 cast)	Mechanical seal (10) See Seal Section	Shaft sleeve and bushing (14) Tungsten carbide
Diffuser (3) Stainless Steel / AISI 304	Strainer (7) Stainless Steel / AISI 316	Cartridge Seal (11) See Seal Section	Tie rods (15) Stainless Steel / AISI 316
Outer sleeve (4) Stainless Steel / AISI 316L	Coupling (8) Aluminium	Elastomers (12) See Seal Section	Screws (16) Stainless Steel / AISI 316
Inducer (17) Stainless Steel / ASTM CF8M (AISI 316 cast)			

Motor

Motor Name PLM 132 B5 7.5 kW	Phase 3	IE Class IE3	Frame Size 132 S
Design IM B5	Rated power 7.5 kW	Enclosure IP 55	ICL F
Standard IEC	Service Factor 1	Efficiency (%) 90.6	Motor Vendor PLM
Shaft Diameter 38 mm	Voltage 380-415/660-690 V	cos phi 0.85	Weight 56 kg
L Shaft 80 mm	Speed 2920.0 rpm	Rated Current 14.1-8.16 A	

10SVI18-18CG075T5VQBV | Hydraulic Data & Performance Curve

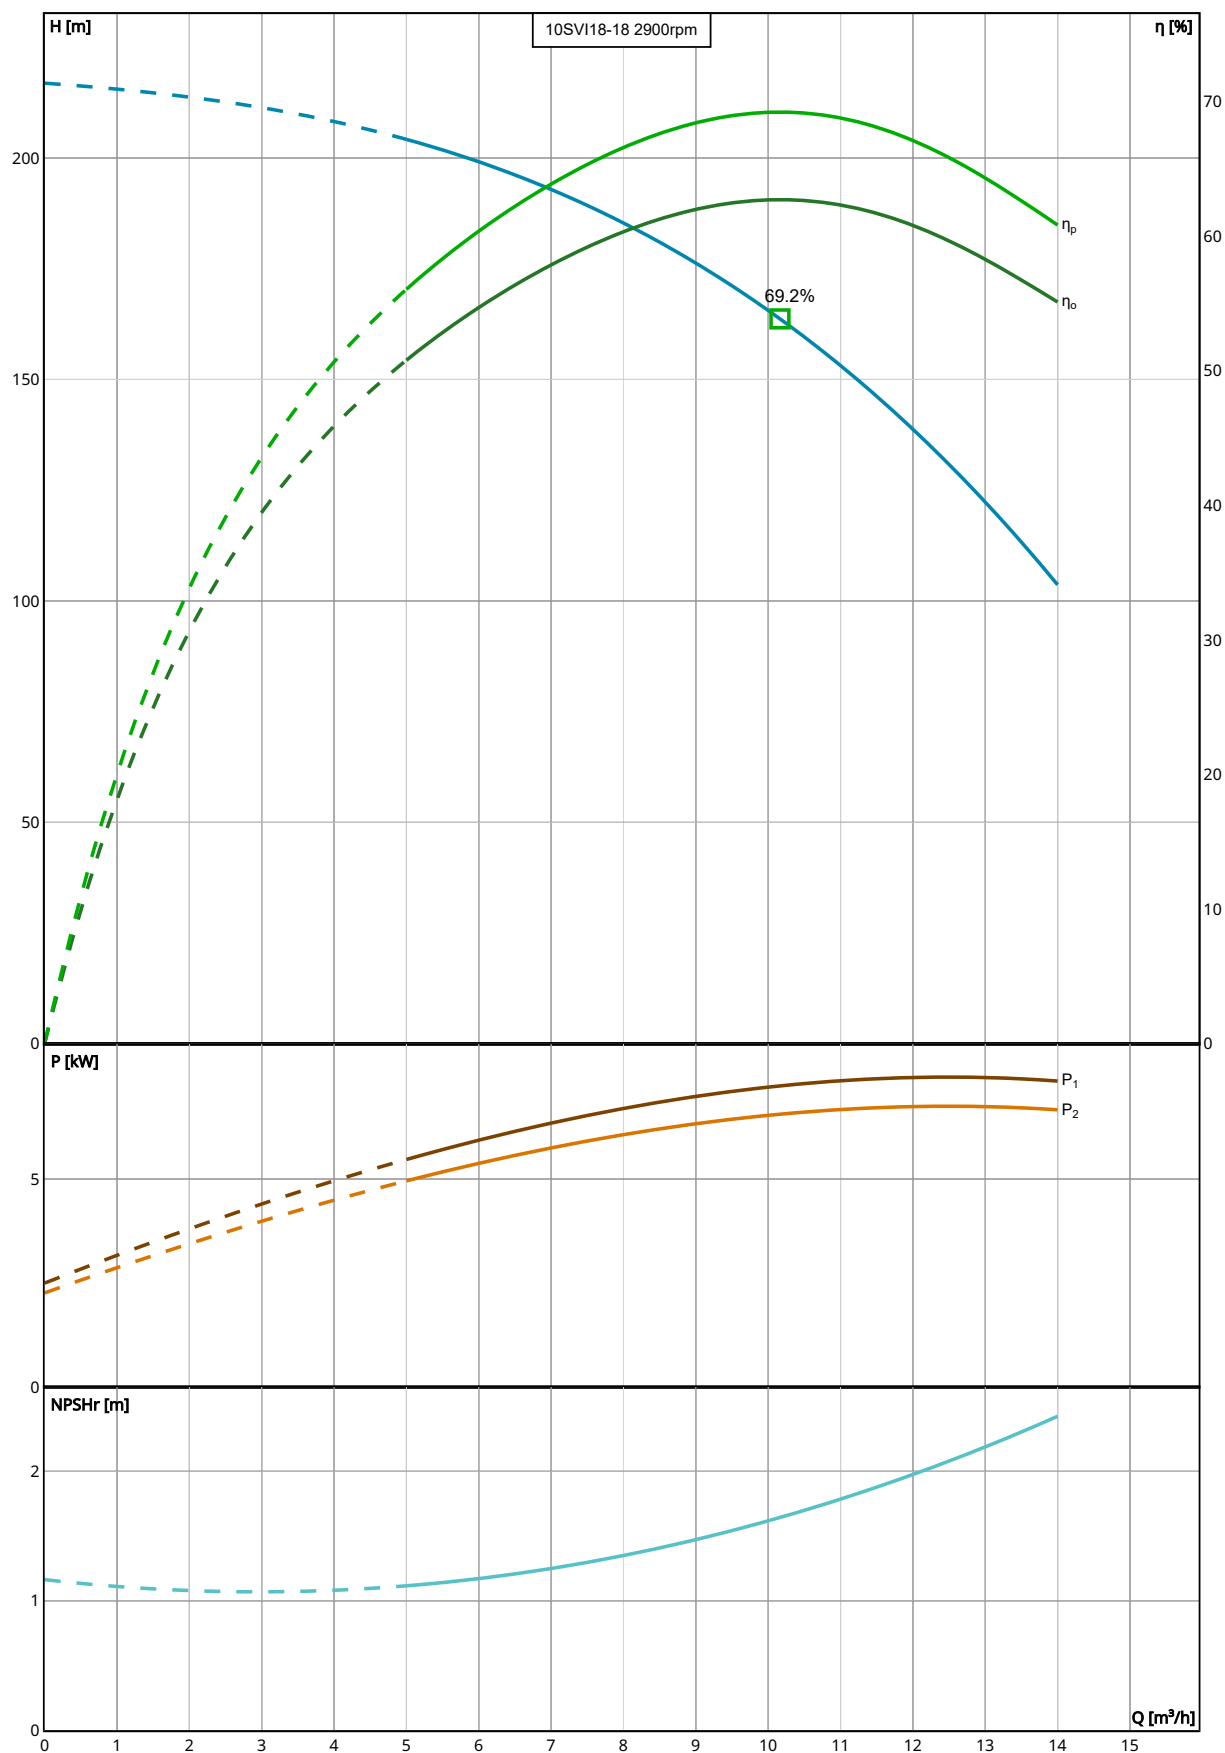

Performance according to ISO 9906:2012

Selection

Series	Standby Pumps
e-SVI	No Standby Pump
Name	
10SVI18-18 2900rpm	
Stages	
18	
Frequency	
50 Hz	
Acceptance Grade	
Manufacturer's Standard	
System Type	
Single Pump	
Operating Pumps	
1	

Fluid and Operating Conditions

Fluid Type	Density
Water	1,000 kg/m ³
Fluid Temperature	Dynamic Viscosity
4 °C	0.002 Pa·s
Specific Gravity	Fluid Vapor Pressure
1	8.14 mbar
	Atmospheric Pressure
	1,013.53 mbar
	Elevation
	0 m
	Ambient Temperature
	20 °C
	NPSH Available
	10.27 m
	Submergence
	0 m

Design Curve

Rated Speed	BEP
2,900 RPM	69.21 %
Min Flow	BEP Flow
5 m ³ /h	10.16 m ³ /h
Max Flow	BEP Head
14 m ³ /h	163.68 m
H@QMin	Max Operating Pressure
204.2 m	21,239.02 mbar
H@QMax	Max P2
103.65 m	6.75 kW

10SVI18-18CG075T5VQBV | Dimensional Data & Drawing



Drawing is preliminary and is subject to change.

Dimensions

D1	L2	Total Weight
256 mm	367 mm	91.89 kg
D2	L3	
300 mm	206.5 mm	
L	M	
1263 mm	191 mm	
L1	Weight (Pump Only)	
689.5 mm	34.89 kg	