


22SVI05-05CG055T5VQBV | Configuration Summary



The e-SVI is an efficient, reliable, high-performance pump, comprised of an energy saving, vertical multistage pump coupled to a IEC high efficient motor. Plus, an immersible hydraulic end provides an ideal solution for top mount applications.

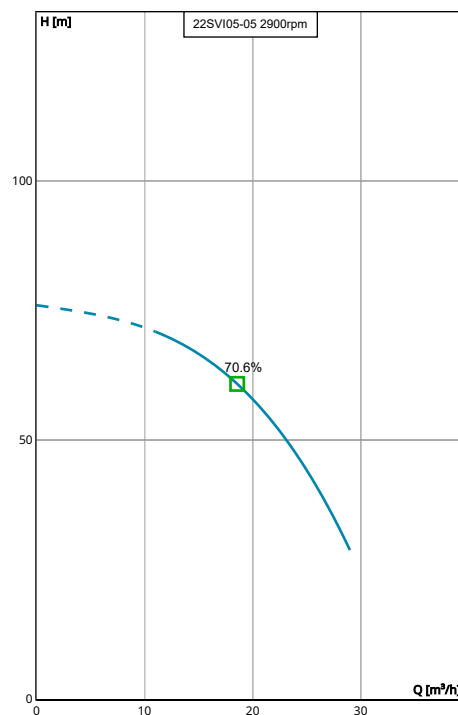

Performance according to ISO 9906:2012

PUMP

Installation	Number Of Impellers
Coupled	5
Immersion Depth	Empty Stages Added
32.16 cm	0
Minimum Depth	Total Number Of Stages
32.16 cm	5
Maximum Depth	Pump Size
104.15 cm	22SVI

MATERIALS

Construction
Stainless Steel (AISI 304)

SEAL

Type of Seal	Rotating Face
Cartridge Seals	Silicon Carbide
Name	Stationary Face
Q1BVG	Resin Impregnated Carbon
	Elastomers
	FKM (FPM)
	Springs
	AISI 316
	Metal Components
	AISI 316
	Min Temperature
	-10.0 °C
	Max Temperature
	90.0 °C

STANDARD OPTIONS

PTC Sensor	UL Approved (cURus)
------------	---------------------


MOTOR

Vendor	Power
Lowara PLM	5.5 kW
Frequency (Hz)	Phase (~)
50	3
Poles	Voltage
2	380-415/660-690 V
Efficiency	
IE3	

No

No

22SVI05-05CG055T5VQBV | Product Details

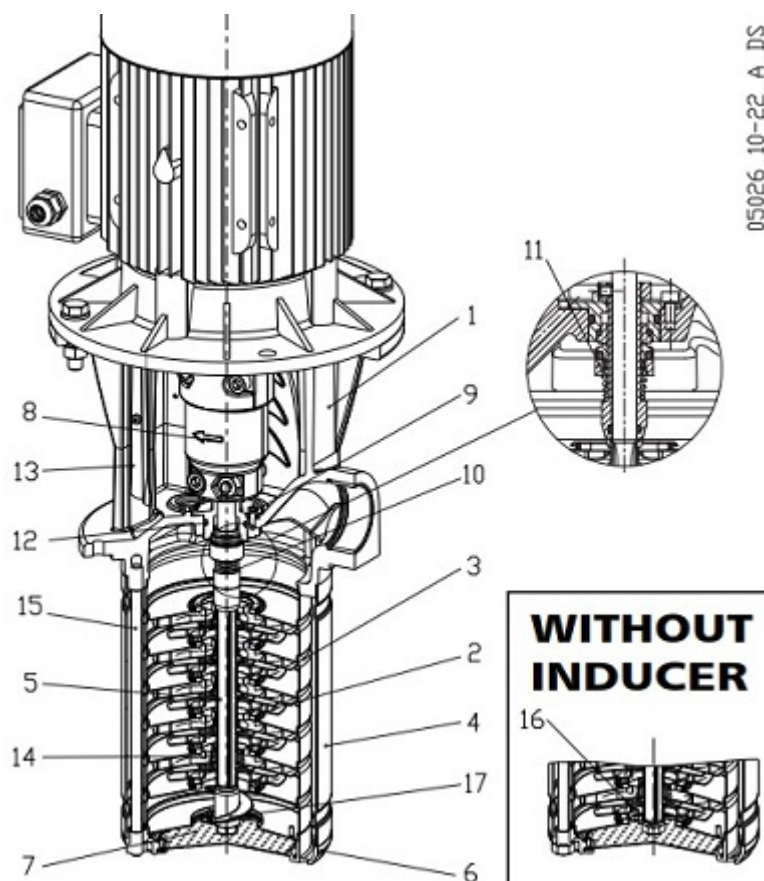

05026_10-22_A_DS


Construction Materials

Adapter (1) Cast iron / ASTM Class 35	Shaft (5) Stainless Steel / AISI 304	Removable seal housing (9) Stainless Steel / ASTM CF8M (AISI 316 cast)	Coupling protection (13) Stainless Steel / AISI 304
Impeller (2) Stainless Steel / AISI 304	Suction base (6) Stainless Steel / ASTM CF8M (AISI 316 cast)	Mechanical seal (10) See Seal Section	Shaft sleeve and bushing (14) Tungsten carbide
Diffuser (3) Stainless Steel / AISI 304	Strainer (7) Stainless Steel / AISI 316	Cartridge Seal (11) See Seal Section	Tie rods (15) Stainless Steel / AISI 316
Outer sleeve (4) Stainless Steel / AISI 316L	Coupling (8) Aluminium	Elastomers (12) See Seal Section	Screws (16) Stainless Steel / AISI 316
Inducer (17) Stainless Steel / ASTM CF8M (AISI 316 cast)			

Motor

Motor Name PLM 132R B5 5.5 kW	Phase 3	IE Class IE3	Frame Size 132 S
Design IM B5	Rated power 5.5 kW	Enclosure IP 55	ICL F
Standard IEC	Service Factor 1	Efficiency (%) 90.3	Motor Vendor PLM
Shaft Diameter 38 mm	Voltage 380-415/660-690 V	cos phi 0.85	Weight 37.6 kg
L Shaft 80 mm	Speed 2880.0 rpm	Rated Current 10.4-6.05 A	

22SVI05-05CG055T5VQBV | Hydraulic Data & Performance Curve

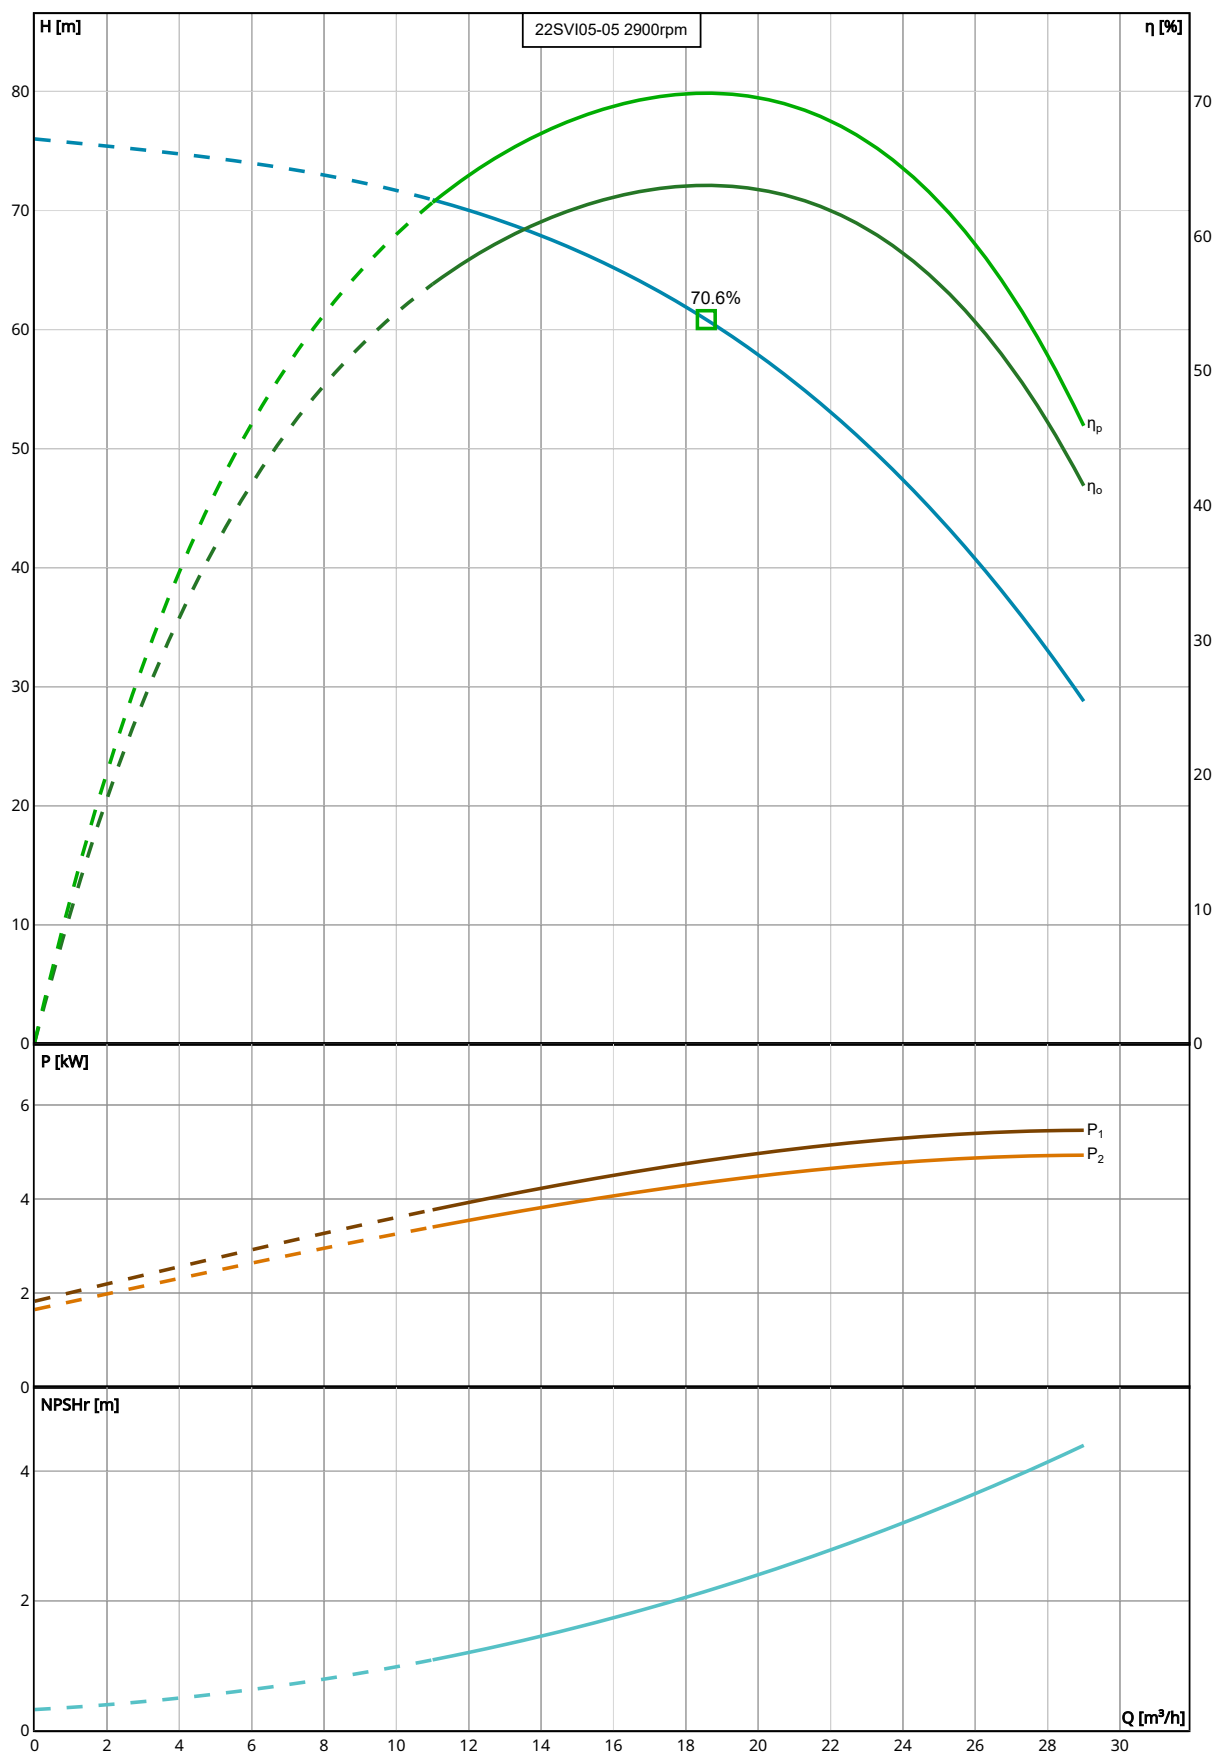

Performance according to ISO 9906:2012

Selection

Series	Standby Pumps
e-SVI	No Standby Pump
Name	
22SVI05-05 2900rpm	
Stages	
5	
Frequency	
50 Hz	
Acceptance Grade	
Manufacturer's Standard	
System Type	
Single Pump	
Operating Pumps	
1	

Fluid and Operating Conditions

Fluid Type	Density
Water	1,000 kg/m ³
Fluid Temperature	Dynamic Viscosity
4 °C	0.002 Pa·s
Specific Gravity	Fluid Vapor Pressure
1	8.14 mbar
	Atmospheric Pressure
	1,013.53 mbar
	Elevation
	0 m
	Ambient Temperature
	20 °C
	NPSH Available
	10.27 m
	Submergence
	0 m

Design Curve

Rated Speed	BEP
2,900 RPM	70.62 %
Min Flow	BEP Flow
11 m ³ /h	18.57 m ³ /h
Max Flow	BEP Head
29 m ³ /h	60.83 m
H@QMin	Max Operating Pressure
70.9 m	7,443.35 mbar
H@QMax	Max P2
28.78 m	4.93 kW

22SVI05-05CG055T5VQBV | Dimensional Data & Drawing



Drawing is preliminary and is subject to change.

Dimensions

D1	L2	Total Weight
214 mm	375 mm	62.37 kg
D2	L3	
300 mm	206.5 mm	
L	M	
951 mm	168 mm	
L1	Weight (Pump Only)	
369.5 mm	24.77 kg	