


STUART

UFH Single Zone Mixer Set

Stuart single loop pump mixer sets have been designed specifically for small areas such as conservatories, kitchens and extensions.

The unit comprises inlet isolation elbows, thermostatic blending valve, ST 15/60 pump and outlet union supplied with a nickel plated surface finish.

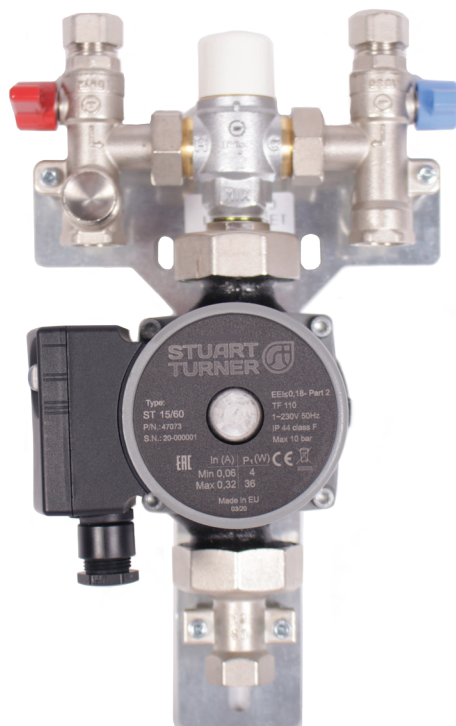


Features

- Supplied with an ERP compliant, high efficiency Stuart ST 15/60 pump
- Robust mounting bracket supplied as standard
- 15mm compression inlet connections
- Inlet isolation valves
- 3 year warranty


Applications

- Small area under floor heating systems

Performance

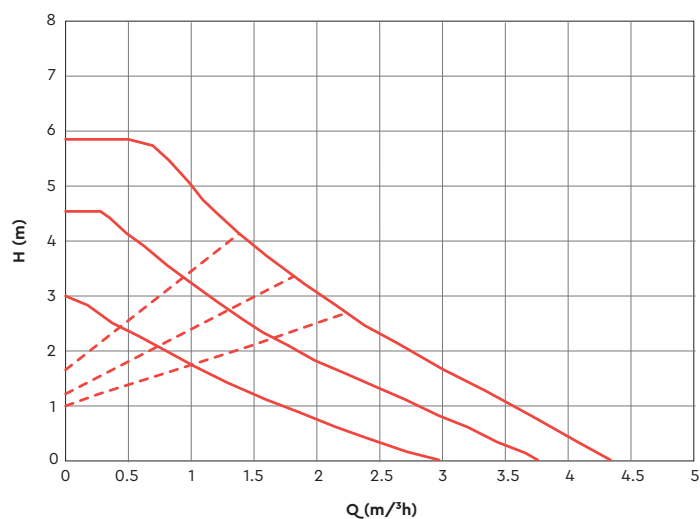

Model		UFH Single Zone Mixer Set 47396
General	Warranty	3 years
Features	Pump type	Centrifugal
	Fitting length	130 mm
	Speed settings	3
Materials	Pump body	Cast iron
	Impeller	Noryl
	Bearings	Ceramic
Performance	Maximum head (closed valve)	5.8 metres
	Maximum flow	3.3 m ³ /h
	Maximum working pressure	10 bar
Connections	Connections	G $\frac{1}{2}$ F / 15mm
Motor	Type	Canned rotor
	Duty rating	Continuous (S1)
Electrical	Power supply / phase / frequency	230 V a.c. / 1 / 50 Hz
	Power consumption	36 Watts (max.)
	Current (full load)	0.32 Amps
	Fuse rating	5 Amps
	Insulation class	F
	EEL	0.18
	Efficiency	38 %
Physical	Enclosure protection	IP44
	Depth	148.5 mm
	Width	195 mm
	Height	308 mm

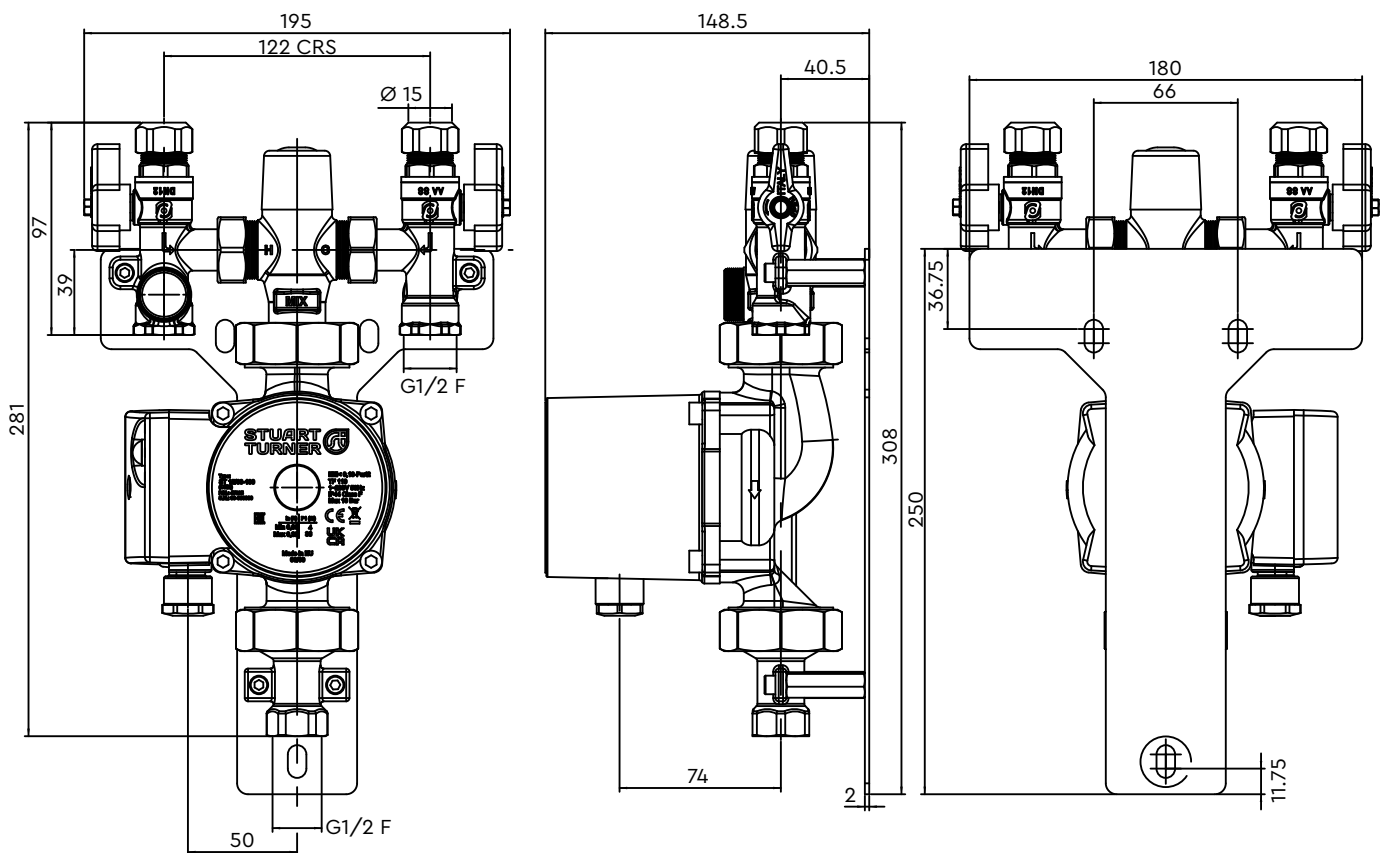

Stuart Turner Limited reserves the right to amend specifications without notice.

Stuart Turner Ltd, Henley-on-Thames, Oxfordshire RG9 2AD Tel: +44 (0) 1491 572655 Fax: +44 (0) 1491 573704
 TechAssist Helpline +44 (0) 800 31 969 80
www.stuart-turner.co.uk

Pt. No. 21245 Issue 1221/01-01